

# BEAM & CELL

## □ Technical

**PANEL SIZES:**  
 Standard is nominal 2'x2'  
 Optional are nominal 1'x1' to 4'x4'

**FINISHES:**  
 Custom painted are polyurethane epoxy (#F47)  
 Mirrored are polishes brite (#F28-Mirrored Silver)  
 (#F27-Mirrored Gold)

**PLENUM:**  
 8" recommended minimum


**FIRE CODE:**  
 Non-combustible. (ASTM E-84)

**MATERIAL:**  
 Cell: 0.020" thick aluminum  
 Beam: 0.024" thick galvanized steel or aluminum  
 (Contact factory for full Architectural specification)

## □ Photo



## □ Section

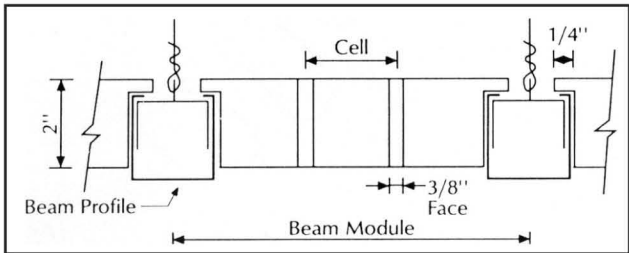

## □ Beam & Cell Data

MODEL NUMBER	BEAM	MODULE	CELL	WT./SQ.FT.
BC1230/2424-F41	1"X2"	24"	3"	1.3 lbs.
BC2240/2424-F41	2"X2"	24"	4"	1.2 lbs.
BC2440/3030-F41	2"X4"	30"	4"	1.4 lbs.
BC3360/4848-F41	3"X3"	48"	6"	0.9lbs.

**First Beam dimension= Face, Second=Depth**  
**Other sizes available**

## □ Installation

