

LOUVER BEAM

Technical

PANEL SIZES:

Standard is nominal 2'x4'
Optional are nominal 1'x1' to 4'x4'

FINISHES:

Custom painted are polyurethane epoxy (#F47)
Mirrored are polishes brite (#F28-Mirrored Silver)
(#F27-Mirrored Gold)

PLENUM:

8" recommended minimum

FIRE CODE:

Non-combustible. (ASTM E-84)


MATERIAL:

Cell: 0.020" thick aluminum (Interior - Std. Duty)
: 0.025" thick aluminum (Intermediate Duty)
(Contact factory for full Architectural specifications)

Photo




Section

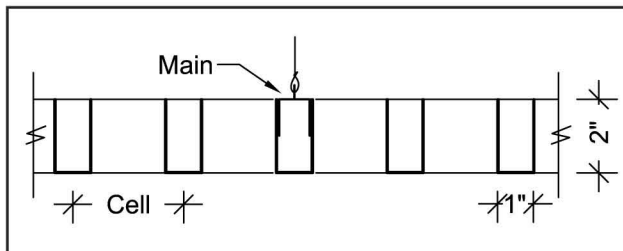

Louver Beam Data

MODEL NUMBER	CELL	WT./SQ. FT.	PANEL
LB1230-2448-F41	3"	1.1 lbs.	2'x4'
LB1240-2448-F41	4"	0.9 lbs.	2'x4'
LB1260-2448-F41	6"	0.7 lbs.	2'x4'
LB1280-2448-F41	8"	0.6 lbs.	2'x4'
LB12120-4848-F41	12"	0.5 lbs.	4'x4'
Other sizes available			

Installation

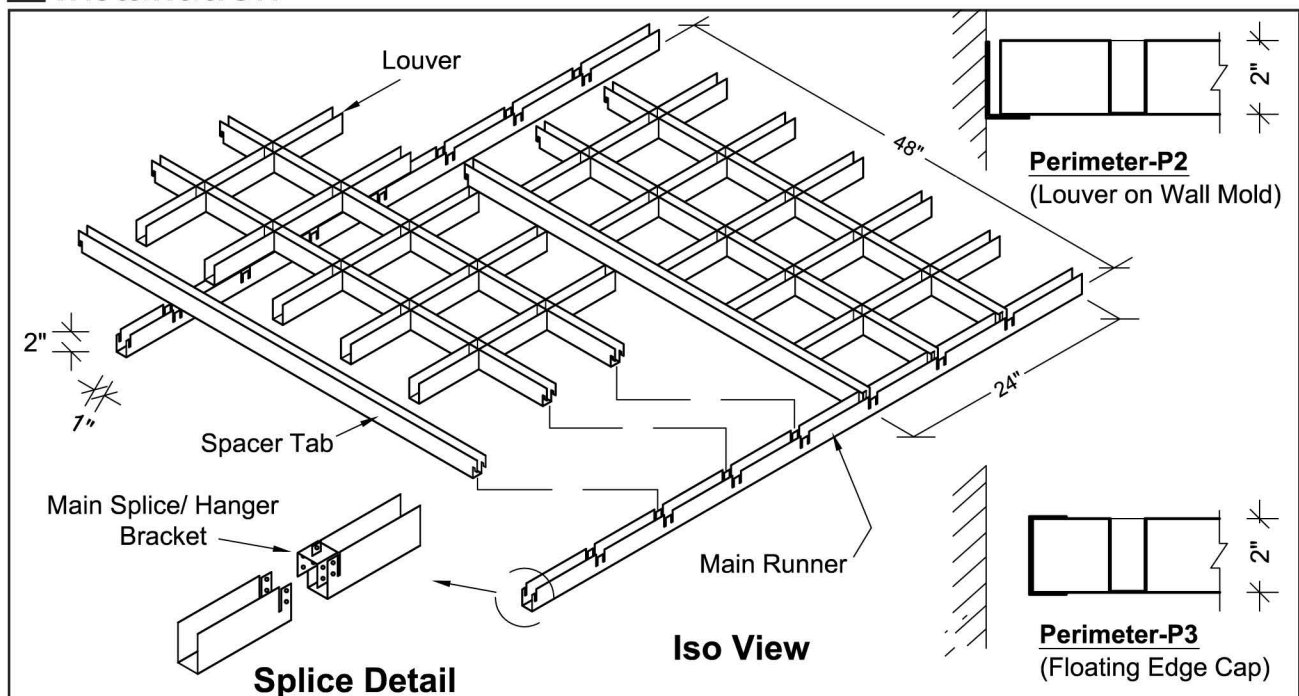

AMERICAN DECORATIVE CEILINGS
(All Rights Reserved)

Mail: Post Office Box 605605 - Cleveland, Ohio 44105
Packages: 4510 East 71st St. - Cleveland, Ohio 44105
Telephone: (216) 341-2222 • Fax: (216) 341-8501
email: info@amer-dec.com